


ENERG


енергия · ενέργεια


Y
IJA

IE
IA




MAG2-09N8
M2O-18N8


SEER 



A⁺⁺


kW **5,3**
 SEER **6,1**
 kWh/annum **310**

SCOP 

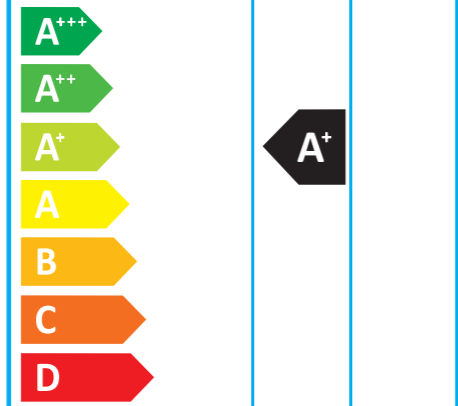


A⁺

kW **X 4,5 X**
 SCOP **X 4,0 X**
 kWh/annum **X 1580 X**

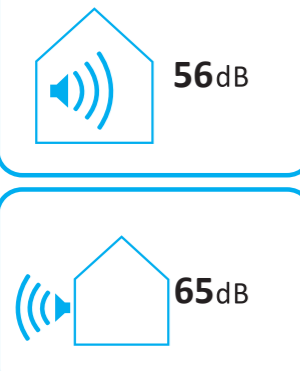

56dB
65dB



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

626/2011

OWNER'S MANUAL - PRODUCT FICHE			
RELATED OWNER'S MANUAL CODE: QS003UI-YTD			
Trade Mark	MIDEA		
Model: Indoor	MAG2-09N8	MAG2-09N8	MAG2-09N8
Model: Outdoor	M2OH-14HFN8-Q	M2OE-18HFN8-Q	M3OG-21HFN8-Q
Sound power level at standard rating conditions (Indoor/Outdoor) [dB(A)]	56/65	56/65	55/66
Refrigerant type	R32	R32	R32
GWP	675	675	675
Charge amount [g]	1100	1250	1500
CO2 equivalent [tonnes]	0.74	0.844	1.01
SEER [W/W]	6.8	6.1	6.5
Energy efficiency class in cooling	A++	A++	A++
Annual electricity consumption in cooling [1] [kWh/a]	215	310	328
Design load in cooling mode (Pdesign) [kW]	4.1	5.3	6.1
SCOP (average heating season) [W/W]	4.0	4.0	4.0
Energy efficiency class in heating (average season)	A+	A+	A+
Annual electricity consumption in heating (average season) [2] [kWh/a]	1340	1580	1890
Warmer heating season		---	
Colder heating season		---	
Design load in heating mode (Pdesign) [kW]	3.8	4.5	5.4
Declared capacity at reference design condition (heating average season) [kW]	3.090	3.520	4.615
Back up heating capacity at reference design condition (heating average season) [kW]	0.710	0.980	0.785
<p>Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to [675]. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be [675] times higher than 1kg of CO₂ , over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional</p> <p>Contains fluorinated greenhouse gases.</p> <p>Importer: Frigicoll SA CL. BLASCO DE GARAYNo4-6 08960 SANT JUST DESVERN BARCELONA 08960 Spain</p> <p>Manufacturer: GD Midea Air-Conditioning Equipment Co., Ltd. Midea Industrial City, Beijiao, Shunde, Foshan, Guangdong, China, Zipcode: 528311</p> <p>[1] [2] Energy consumption "XYZ" kWh per year, based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.</p>			
<p>Note: Please check the model information above according to the model name on the nameplate.</p>			



English

Name or trademark
Model
Sound power level at standard rating conditions
Refrigerant type
GWP
EER
Energy efficiency class in cooling
COP
Energy efficiency class in heating
Cooling capacity (Prated)
Heating capacity (Prated)

Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 3. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 3 times higher than 1kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

Energy consumption 1,4 kWh per 60 minutes in cooling mode, 1,1 kWh per 60 minutes in heating mode, based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

Español

Nombre o marca registrada
Modelo
Nivel de potencia acústica en condiciones de clasificación estándar
Tipo de refrigerante
GWP
EER
Clase de eficiencia energética en refrigeración
COP
Clase de eficiencia energética en calefacción
Capacidad de refrigeración (Prated)
Capacidad de calefacción (Prated)

La fuga de refrigerante contribuye al cambio climático. El refrigerante con menor potencial de calentamiento global (GWP) contribuiría menos al calentamiento global que un refrigerante con mayor GWP, si se filtrase a la atmósfera. Este equipo utiliza un fluido refrigerante con un GWP de 3. Este valor significa que si 1 kg de este fluido refrigerante se filtrase a la atmósfera, el impacto sobre el calentamiento global sería 3 veces mayor que 1 kg de CO₂, durante un período de 100 años. Nunca intente manipular el circuito del refrigerante ni desarme el producto usted mismo, consulte siempre a un profesional.

Consumo de energía 1,4 kWh por 60 minutos en modo refrigeración, 1,1 kWh por 60 minutos en modo calefacción, basado en resultados estándar de test. El consumo energético real dependerá de cómo se utilice el producto y dónde se encuentre.

Française

Nom ou marque
Modèle
Niveau de puissance acoustique dans des conditions nominales standard
Type de réfrigérant
PRG
EER
Classe d'efficacité énergétique en mode refroidissement
COP
Classe d'efficacité énergétique en mode chauffage
Capacité de refroidissement (Prated)
Capacité de chauffage (Prated)

Les fuites de réfrigérant contribuent au changement climatique. Les réfrigérants dont le potentiel de réchauffement global (PRG) est plus faible contribuent moins au réchauffement global que les réfrigérants dont le PRG est plus élevé, en cas de fuite dans l'atmosphère. Cet appareil contient un fluide réfrigérant dont le PRG est égal à 3. Cela signifie que si 1 Kg de ce fluide réfrigérant venait à se déverser dans l'atmosphère, l'impact en termes de réchauffement global serait 3fois supérieur à 1 Kg de CO₂ sur une période de 100 ans. Ne tentez jamais d'intervenir vous-même sur le circuit de réfrigérant ni de démonter le produit par vous-même. Demandez toujours de l'aide à un professionnel.

Consommation d'énergie 1,4 kWh par 60 minutes en mode de refroidissement, 1,1 kWh par 60 minutes en mode de chauffage, sur la base des résultats des tests standard. La consommation d'énergie réelle dépendra de la manière dont l'appareil est utilisé et de son emplacement.

